


WATERAX

B2X 21 / 23 HP

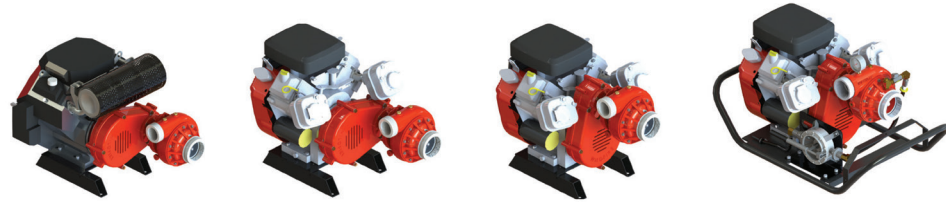

PRODUCT SELECTION MATRIX

		B2X-21 Vehicle Mount Horizontal Drive	B2X-23 Vehicle Mount Horizontal Drive		B2X-23 Vehicle Mount Vertical Drive		B2X-23 Portable			
		B2X-21H	B2X-23H	B2X-23HX	B2X-23V	B2X-23VX	B2X-23P	B2X-23PC	B2X-23VX	B2X-23PETC
SPECIFICATIONS	Performance (standard NFPA Conditions)	Flow @ 50 PSI (3.4 BAR)	275 GPM (1041 lpm)		285 GPM (1079 lpm)					
		Flow @ 100 PSI (6.9 BAR)	215 GPM (814 lpm)		215 GPM (814 lpm)					
		Flow @ 150 PSI (10.3 BAR)	112 GPM (424 lpm)		100 GPM (379 lpm)					
		Maximum Pressure	200 PSI (13.8 BAR)		200 PSI (13.8 BAR)					
		Maximum Flow	300 GPM (1136 lpm)		300 GPM (1136 lpm)					
	Pump Type	High Pressure - Medium Flow	2-Stage Centrifugal Pump			2-Stage Centrifugal Pump				
	Pump Standard Connections	Intake	3" Female NPT/4" VIC Combination			3" Female NPT/4" VIC Combination				
		Discharge	2-1/2" Female NPT/3" VIC Combination			2-1/2" Female NPT/3" VIC Combination				
	Engine Type	Air Cooled Gasoline	Honda GX630			B&S Vanguard				
	Engine Max Power	[Torque]	20.8 hp (15.5 KW) @ 3600 RPM [35.6 lb-ft (48.3 Nm) @ 2500 RPM]			23 hp (17.2 KW) @ 3600 RPM [32.75 lb-ft (44.4 Nm) @ 2600 RPM]				
Drive	Orientation (timing belt, 1.88 : 1 speed increasing ratio)	Horizontal	Horizontal		Vertical		Vertical			
Frame		Base Mount with Industrial Isolators	Base Mount with Industrial Isolators		Base Mount with Industrial Isolators		Carry Frame			
Dry Weight*		169 lbs (77 kg)	156 lbs (71 kg)	164 lbs (74 kg)	156 lbs (71 kg)	162 lbs (73 kg)	167 lbs (76 kg)	169 lbs (77 kg)	170 lbs (77 kg)	195 lbs (88 kg)

* Approximated and varies based off option selections

		B2X-21H	B2X-23H	B2X-23HX	B2X-23V	B2X-23VX	B2X-23P	B2X-23PC	B2X-23VX	B2X-23PETC	
OPTIONS	Primer	Guzzler Hand Primer	-	-	-	-	S	S	-	-	
		Remote Exhaust Primer w/Control Cable	-	-	S	-	S	-	-	-	
		Exhaust Primer	-	-	-	-	-	-	-	S	-
		Electric Package - Electric Primer, LED work light, & Battery	-	-	-	-	-	-	-	-	S
	Muffler	Horizontal low tone	S	-	-	-	-	-	-	-	-
		Dual low tone	-	S	-	S	-	S	S	-	-
		Exhaust primer muffler	-	-	S	-	S	-	-	S	S
	Fuel Tank	Integral / 1.75 US gallons (6.6 L)	-	-	-	-	-	-	-	-	-
		Integral / 1 US gallon (3.8 L) w/ 3-way valve	-	-	-	-	-	-	-	S	S
	Controls	Engine Mount Control Panel	-	-	-	-	-	-	S	S	S
Remote Mount Control Panel - XCP Series		0	0	0	0	0	-	-	-	-	
Discharge Gauge	0-600 psi, 2-1/2" dial	-	-	-	-	-	S	S	S	S	
FastWire CTRL Cable	B&S 3' CTRL Cable with 8 pin connector (FWC-B-3)	-	S	S	S	S	-	-	-	-	
	Honda GX630 3' CTRL Cable with 8 pin connector (FWC-H-3)	S	-	-	-	-	-	-	-	-	

Standard S
Option O
Not Applicable —



WE MOVE WATER

WATERAX

All information contained in this document including drawings is proprietary to *WATERAX* and may not be copied, reproduced or used in whole or in part without our prior written permission. The information in this document is subject to change without notice. Model displayed with multiple options. Weight and dimensions are approximated and may vary depending on options.

WATERAX INC.
6635 Henri-Bourassa W.
Montreal, QC H4R 1E1
T 514 637-1818
F 514 637-3985
TF 1 855 616 616-1818
info@waterax.com

waterax.com

To help you stay **#ReadyForWildfires**, we've made a few changes, placing 100% of our focus on manufacturing our core products, portable fire pumps. To do so, we've established a network of trusted supply and distribution partners that can help us provide *WATERAX* pumps quickly in addition to water-handling equipment and accessories.

For immediate assistance when it comes to pumps and water-handling accessories, please [contact your local dealer](#).

For genuine spare parts, visit our [online store](#).

B2X™ is a trademark of Waterax.



**WE MOVE
WATER**