




Item no: 100067

The **B2X-21H** is powered by a 21 HP Honda engine and configured with a base mount for vehicle use, 8-pin FastWire connections and a horizontal-drive unit.

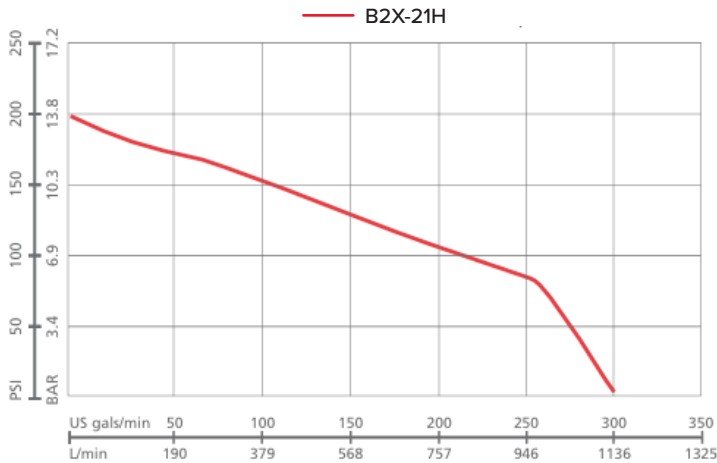

Flow rate at specified pressure

Maximum pressure: **200 PSI** (13.8 Bar)
 Free flow: **300 US gals/min** (1136 L/min)
 Maximum head: **482'** (141 m)
 Weight: **169 lbs** (77 kg)

Performance

Flow		Pressure		
US GPM	L/min	@	PSI	Bar
275	1041	@	50	3.4
215	814	@	100	6.9
112	424	@	150	10.3

B2X-21H

MID-RANGE PUMP

APPLICATIONS

- Vehicle-mounted applications.
- Brush trucks.
- Initial attack units.
- Slip-on units.
- Structure protection.
- Water transfer.
- Boat fire pump.
- Simultaneous attack lines.

FEATURES AND BENEFITS

- Quick-release clamp and detachable pump end for ease of maintenance and minimal equipment downtime.
- Belt drive system for reliable, low maintenance performance.
- Aluminum alloy pump components and anodized parts for lighter weight and great resistance to corrosion.
- EPA certified.
- **Application matched and approved by HONDA.**

Scan the QR code to learn more

