




NEW

Item no: 100162

The **B2X-25H vehicle-mounted pump** features a powerful 24.8 HP HONDA IGX800 EFI engine and delivers best-in-class mid-range performance for municipal and wildland urban interface operations. The low-maintenance belt-drive system and quick-release clamp ensure dependable operation and fast servicing.

It offers full DCP compatibility in both single and dual control panel configurations, with engine speed controlled directly through the ECU—no throttle actuator required.

Compatible with DCP

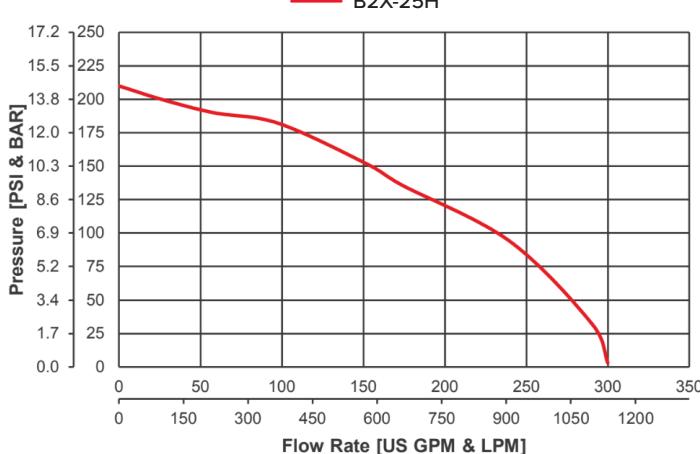

Flow rate at specified pressure

Maximum pressure: **210 PSI** (14.8 Bar)
Free flow: **300 US gals/min** (1136 L/min)
Maximum head: **484'** (148 m)
Weight: **178.5 lbs** (81.2 kg)

Performance

Flow		Pressure		
US GPM	L/min	PSI	Bar	
278	1051	@	50	3.4
233	881	@	100	6.9
155	586	@	150	10.3

B2X-25H

MID-RANGE PUMP

APPLICATIONS

- Interface wildfire operations.
- Vehicle-mounted applications.
- Brush trucks.
- Initial attack units.
- Slip-on units.
- Structure protection.
- Water transfer.
- Boat fire pump.
- Simultaneous attack lines.

FEATURES AND BENEFITS

- Quick-release clamp and detachable pump end for ease of maintenance and minimal equipment downtime.
- Unique blister resistant mechanical rotary seal to prolong pump end longevity.
- Sealed bearing to eliminate pump end greasing in the field.
- Drive assembly for reliable, low maintenance performance.
- Aluminum alloy pump components and anodized parts for lighter weight and great resistance to corrosion.
- FastWire included on all vehicle-mounted units.
- EPA certified.

Scan the QR code
to learn more



WATERAX 
WE MOVE WATER