



Item no: 100157 / 100158


The **B2X-D902 vehicle-mounted pump** features a 25 HP powerful Kubota D902-E4B Diesel engine. A strong show of both pressure and volume makes it the ideal pump for vehicle mounted applications dedicated to municipal and wildland urban interface operations.

Fully DCP-compatible in both single and dual control panel setups, it allows engine speed adjustment via a linear throttle actuator.

The WATERAX quick release clamp provided on the B2X pump provides ease of maintenance without having to disassemble the complete pump unit thus significantly reducing equipment downtime.

***Available with both vertical or horizontal drive**

Compatible with DCP

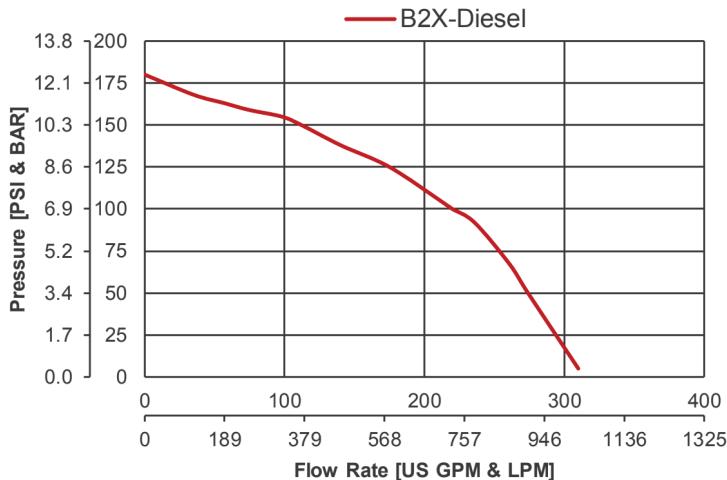

Flow rate at specified pressure

Maximum pressure: **180 PSI** (12.4 Bar)

Free flow: **310 US gals/min** (1173 L/min)

Maximum head: **415'** (127 m)

Weight: **180 lbs** (127 kg)

Performance

Flow		Pressure		
US GPM	L/min	PSI	Bar	
274	1037	@	50	3.4
220	833	@	100	6.9
112	424	@	150	10.3

B2X-D902

MID-RANGE PUMP DIESEL

APPLICATIONS

- Interface wildfire operations.
- Vehicle-mounted applications.
- Brush trucks.
- Initial attack units.
- Slip-on units.
- Structure protection.
- Water transfer.
- Boat fire pump.
- Simultaneous attack lines.

FEATURES AND BENEFITS

- Quick-release clamp and detachable pump end for ease of maintenance and minimal equipment downtime.
- Unique blister resistant mechanical rotary seal to prolong pump end longevity.
- Sealed bearing to eliminate pump end greasing in the field.
- Drive assembly for reliable, low maintenance performance.
- Aluminum alloy pump components and anodized parts for lighter weight and great resistance to corrosion.
- FastWire included on all vehicle-mounted units.
- EPA certified.

Scan the QR code to learn more



WATERAX 
WE MOVE WATER