

**NEW**

Item no: 100157 / 100158


The **B2X-D902 vehicle-mounted pump** features a 25 HP powerful Kubota D902-E4B Diesel engine. A strong show of both pressure and volume makes it the ideal pump for vehicle mounted applications dedicated to municipal and wildland urban interface operations.

Fully DCP-compatible in both single and dual control panel setups, it allows engine speed adjustment via a linear throttle actuator.

The WATERAX quick release clamp provided on the B2X pump provides ease of maintenance without having to disassemble the complete pump unit thus significantly reducing equipment downtime.

**\*Available with both vertical or horizontal drive**

**Compatible with DCP**

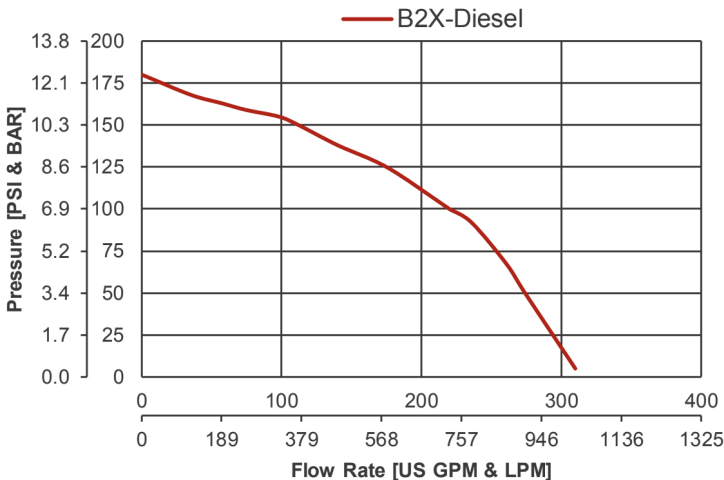

**Flow rate at specified pressure**

Maximum pressure: **180 PSI** (12.4 Bar)  
 Free flow: **310 US gals/min** (1173 L/min)  
 Maximum head: **415'** (127 m)  
 Weight: **280 lbs** (127 kg)

**Performance**

Flow		Pressure		
US GPM	L/min	@	PSI	Bar
274	1037	@	50	3.4
220	833	@	100	6.9
112	424	@	150	10.3

# B2X-D902

## MID-RANGE PUMP DIESEL

### APPLICATIONS

- Interface wildfire operations.
- Vehicle-mounted applications.
- Brush trucks.
- Initial attack units.
- Slip-on units.
- Structure protection.
- Water transfer.
- Boat fire pump.
- Simultaneous attack lines.

### FEATURES AND BENEFITS

- Quick-release clamp and detachable pump end for ease of maintenance and minimal equipment downtime.
- Unique blister resistant mechanical rotary seal to prolong pump end longevity.
- Sealed bearing to eliminate pump end greasing in the field.
- Drive assembly for reliable, low maintenance performance.
- Aluminum alloy pump components and anodized parts for lighter weight and great resistance to corrosion.
- FastWire included on all vehicle-mounted units.
- EPA certified.

**Scan the QR code to learn more**

