


PRODUCT SELECTION MATRIX

BB-4[®]
DIESEL 25 HP

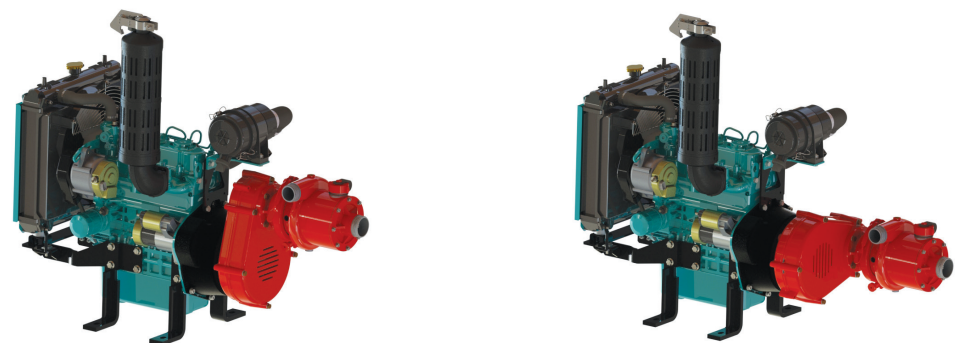

		BB-4 DIESEL Vehicle Mount Vertical Drive	BB-4 DIESEL Vehicle Mount Horizontal Drive
		BB-4-D902V	BB-4-D902H
SPECIFICATIONS	Performance (standard NFPA Conditions)	Flow @ 150 PSI (10.3 BAR)	65 GPM (246 lpm)
		Flow @ 250 PSI (17.2 BAR)	103 GPM (390 lpm)
		Flow @ 350 PSI (24.1 BAR)	106 GPM (401 lpm)
		Maximum Pressure	395 PSI (27.2 bar)
		Maximum Flow	106 GPM (401 lpm)
	Pump Type	High Pressure	Detachable 4-Stage Centrifugal Pump
	Pump Standard Connections	Intake	2" Male NPSH
		Discharge	1-1/2" Male NPSH
	Engine Type	Fuel Injected Liquid Cooled Diesel	Kubota D902-E4B 3-Cylinder
	Engine Max Power		24.8 HP (18.5 kW) @ 3600 RPM [40.6 lb-ft (55 Nm) @ 2600 RPM]
Frame		4 Leg Mounts	
Drive	Orientation (timing belt, 1.88:1 speed increasing ratio)	4 Leg Mounts	
Dimensions	L x W x H	39.8" x 20.6" x 37"	39.8" x 21.9" x 37"
Dry Weight*		280 lbs (127 kg)	280 lbs (127 kg)

* Approximated and varies based off option selections

OPTIONS		BB-4-D902V	BB-4-D902H
		Primer	Guzzler Hand Primer
	Electric Primer	0	0
Muffler	Rain Cap	S	S
	Forestry Approved Spark Arrestor	0	0
Controls	PMSCP-DIESEL	0	0
	LOFA	0	0
Fastwire	FWX-D902-3 3' Extension Harness	0	0

Standard s
Option o
Not Applicable —