


Item no: 100155 / 100156

The **BB-4-D902 vehicle-mounted pump** features a 25 HP powerful Kubota D902-E4B Diesel engine. Strong enough to operate as a source pump for tandem and parallel pumping, it is also optimal for direct attack firefighting, remote watering, sprinkler systems, and is a popular choice for slip-on units.

Fully DCP-compatible in both single and dual control panel setups, it allows engine speed adjustment via a linear throttle actuator.

**\*Available with both vertical or horizontal drive**

**Compatible with DCP**

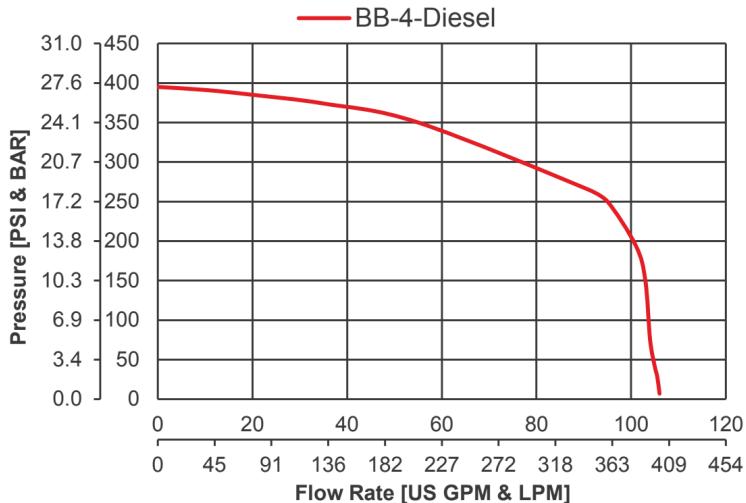

#### Flow rate at specified pressure

Maximum pressure: **395 PSI** (27.2 Bar)

Free flow: **106 US gals/min** (401 L/min)

Maximum head: **911'** (278 m)

Weight: **180 lbs** (127 kg)

#### Performance

Flow		Pressure		
US GPM	L/min	PSI	Bar	
106	401	@	150	10.3
103	390	@	250	17.2
65	246	@	350	24.1

# BB-4-D902

## HIGH-PRESSURE FIRE PUMP DIESEL

### APPLICATIONS

- Slip-on units.
- Pump-and-roll.
- Attack line firefighting.
- Long hose lay for remote watering during firefighting operations.
- High elevation firefighting in mountainous areas.
- Accuracy in flow trajectory when structure fire fighting.
- Tandem pumping over long distances.
- Parallel pumping for higher volumes.

### FEATURES AND BENEFITS

- Quick release clamp and swappable pump ends for minimal equipment downtime and inventory.
- Sealed bearing to eliminate pump end greasing in the field.
- Belt drive system for reliable, low maintenance performance.
- Aluminium alloy pump components and anodized parts for lighter weight and greater resistance to corrosion.
- Comprehensive user and service manuals.
- Single or Dual control panel with remote throttle control.
- EPA Certified.

**Scan the QR code to learn more**

