





The **MARK-3**° lightweight portable fire pump has been moving water for forestry agencies around the world since 1964.

It quickly became the gold standard for performance, reliability and durability in wildland firefighting operations.

To improve the **MARK-3**° pump and update it for the challenges of modern-day wildland firefighting, WATERAX sought the feedback of wildland firefighters.

They challenged WATERAX to cut down size and weight without sacrificing performance and reliability.

While maintaining the iconic look of the classic MARK-3° pump*, the all-new MARK-3° Watson Edition is an entirely new platform that boasts exciting modernized features including the first ever purpose-built engine for a wildland pump.

SMALLER

20% 30% 100% MARK-3®

A Modern Pump for the Modern Firefighter

Maintaining the tradition while moving technology forward: the **MARK-3**° **Watson Edition** plugs right into your existing **MARK-3**° water-moving systems. It will set a new benchmark of excellence for high-pressure fire pumps in the wildland firefighting community for generations to come. The **MARK-3**° Watson Edition greatly improves user experience in the following areas:

Mobility

Unit is 30% lighter and 20% smaller.

- Integrated carriage system
- Easy loading / unloading
- Option to backpack engine side up or down
- Integrated carry handle

Safety

Pump design and features to improve firefighter safety.

- Ergonomic carriage system reduces the risk of back injuries
- Padded straps protect shoulders and back from bruising
- Muffler heat shield protects against severe burns
- Lighter pump reduces incidence and severity of slips, trips, falls and transport-related injuries

User-friendliness


Smart, intuitive and easy to use.

- LED visual interface
- Engine operating status
- Troubleshooting function
- High temperature protection

Ease of start

Starting a MARK-3® pump has never been this easy!

- Less force required for easier pull start
- Foothold for improved steadiness
- Engine warm-up indicator
- Anti-flooding feature reduces risk of flooding engine

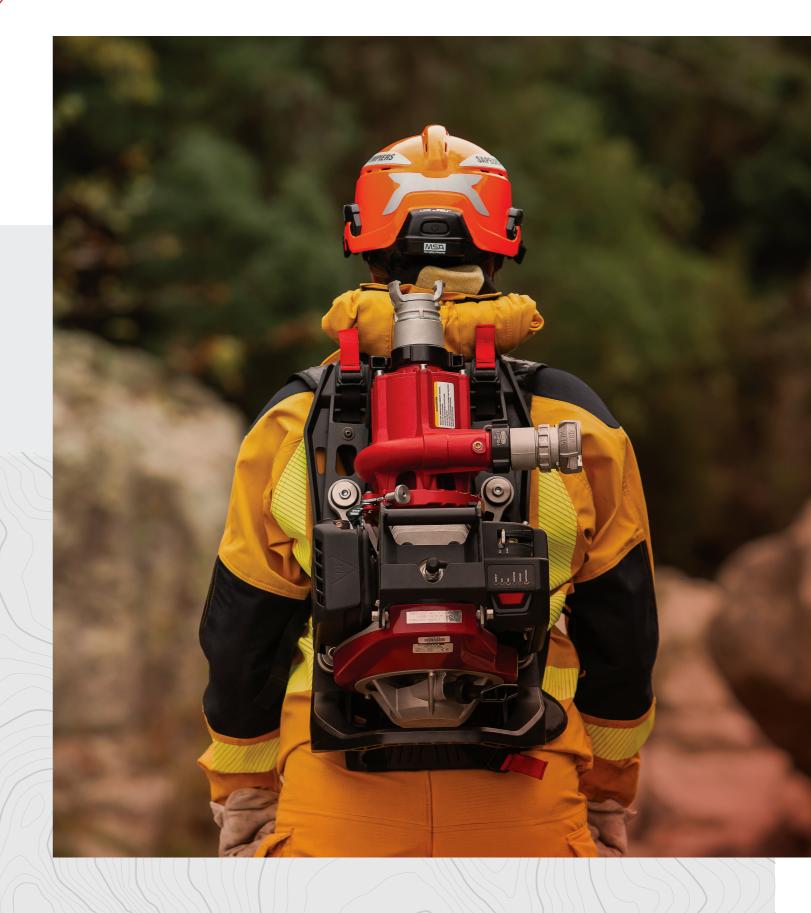

The Evolution of the Iconic MARK-3®







4-Stage High-Pressure Pump End

Same Performance, Less Weight, More Compact

- 30% smaller impellers
- 50% reduction in pump end weight
- Optimized hydraulic efficiency
- Corrosion-free composite material

High-Performance Engine

Smaller, Quieter, More Powerful

- Unmatched power-to-weight ratio
- Purpose-built
- More power, 30% lighter
- Perfectly optimized for smaller pump end

Modern User Interface

Smart and Intuitive

- Maintenance indicator
- Fuel depletion indicator
- Engine warm-up indicator
- Loss of prime protection (overspeed)
- High temperature protection (overheat)
- USB port for advanced diagnostics
- Bluetooth® connectivity



Composite Base Frame

Light, Flexible, and Durable

- Lightweight composite material
- Vibration and shock dampening
- Extended durability
- Foothold for steady pull start
- "Snow shoe" concept for improved grounding in swampy terrain
- More than twice the contact area compared to previous MARK-3® model
- Military-grade Fidlock® quick-release system to instantly remove carrying straps (Item No. 701798)



PERFORMANCE



Flow



	MARK-3®						
Flow			Pressure				
	US GPM	L/min		PSI	bar		
	78	295	@	100	6.9		
	65	246	@	150	10.3		
	38	144	@	250	17.2		


MARK-3® WATSON EDITION						
Flow			Pressure			
US GPM	L/min		PSI	bar		
80	303	@	100	6.9		
70	265	@	150	10.3		
40	151	@	250	17.2		


 Max Head
 267 m (877')

 Max Pressure
 26.2 bar (380 PSI)

 Max Flow
 371 L/min (98 US GPM)

Max Head Max Pressure Max Flow 267 m (877') 26.2 bar (380 PSI) 379 L/min (100 US GPM)

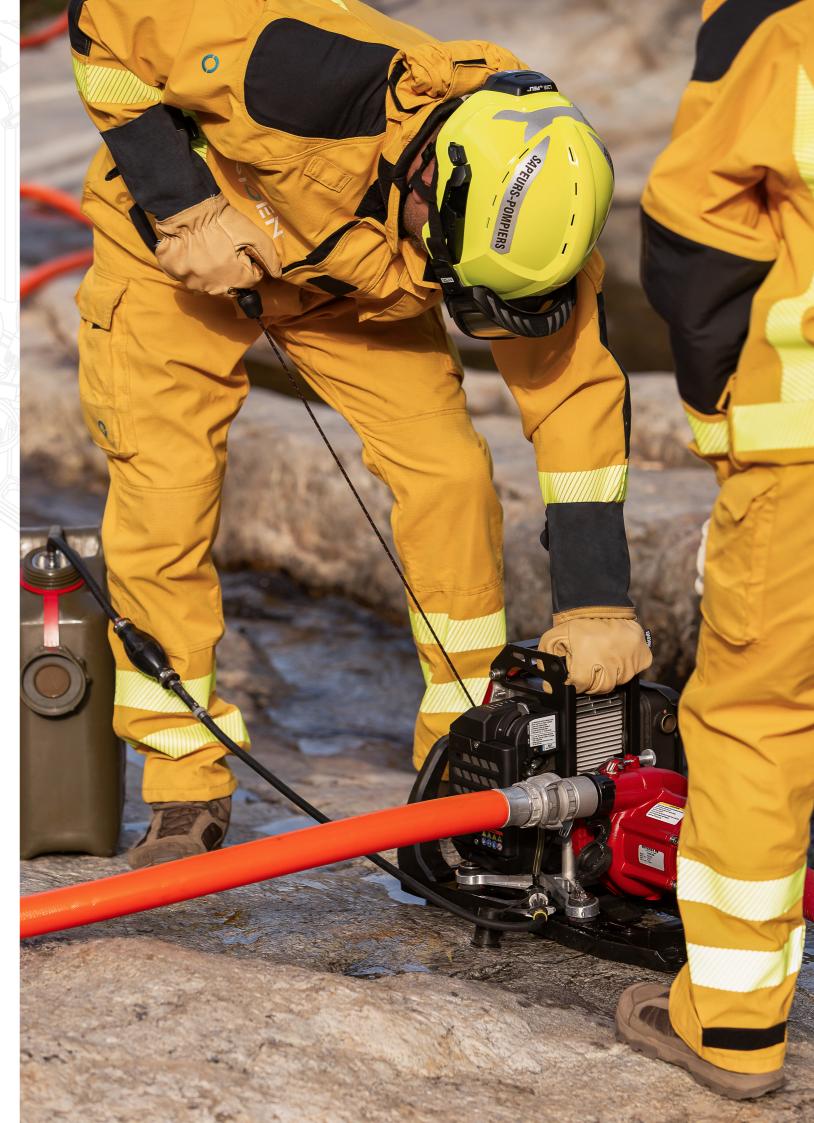

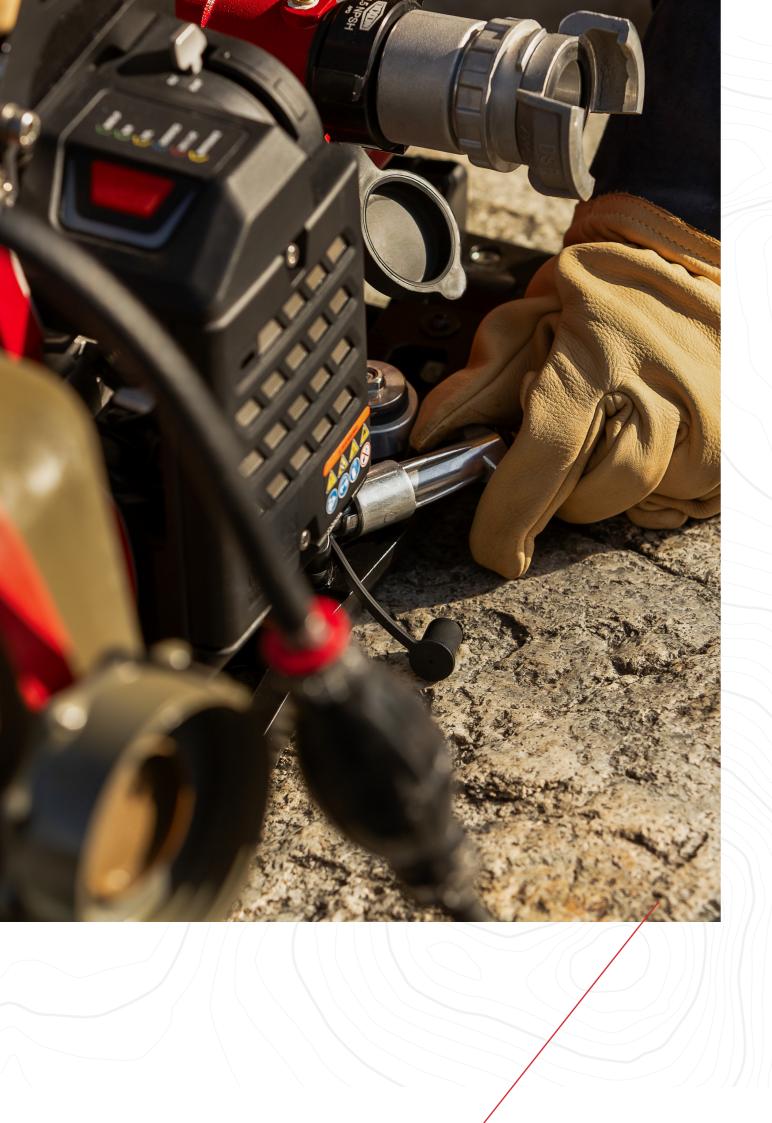


TECHNICAL SPECIFICATIONS

	MARK-3 [®]	MARK-3® WATSON EDITION	
ENGINE	WATERAX 185cc, 2-cycle, air-cooled, Nikasil® coated	WATERAX 140cc, 2-cycle, air-cooled, Nikasil® coated	
POWER	7.5 kW (10 hp) @ 5,500 RPM	8kW (10.7 hp) @ 8,000 rpm	
TORQUE	12 Nm (8.9 lb-ft) @ 5,000 RPM	10 Nm (7.6 lb-ft) @ 7,050 RPM	
EXHAUST SYSTEM	Painted steel muffler with spark arrestor - USDA Forest Service Standard 5100-01	Painted stainless steel muffler with spark arrestor - USDA Forest Service Standard 5100-01	
SOUND LEVEL	Does not exceed 90 dBA @ 13 feet	Does not exceed 90 dBA @ 13 feet	
MUFFLER HEAT SHIELD	N/A	Painted stainless steel	
RECOIL STARTER	Mechanical rewind starter with manual rope starter backup	Mechanical rewind starter with manual rope starter backup	
CARBURETOR	Diaphragm carburetor	Zama® diaphragm carburetor with integrated fuel pump and stand-alone purge bulb	
FUEL CONNECTION	Mercury - CAD & INT Model (MK3) SAE Flare 45 - USA Model (MK3-U)	SAE 45° with Mercury adaptor	
SPARK PLUG	M18 x 12 mm reach, non-resistor, copper core, nickel electrodes	M14 x 9.5 mm reach, resistor, copper core, nickel electrodes	
IGNITION	Ducati CDI capacitive discharge ignition	Prufrex® CDIM capacitive discharge ignition module with overspeed safety cut-off	
USER INTERFACE MODULE	Digital overspeed switch (DOS) with integrated OFF button	OFF button with daylight visible LEDs. Prufrex® ESG with overspeed and overheat protection. USB-C connector and Bluetooth® wireless connection	
POWER GENERATOR	N/A	Ducati Energia 20 W, 13 V, 1.5 A with voltage regulator module	
PUMP END	Detachable 4-stage centrifugal high-pressure	Detachable 4-stage centrifugal high-pressure	
PUMP CLAMP	Quick-release lightweight pump clamp	Quick-release lightweight pump clamp	
COUPLING	Stratified coupling buffer	Reinforced flexible gear coupling sleeve	
VOLUTE & COVER	Anodized aluminum alloy	Anodized aluminum alloy	
IMPELLERS	Anodized aluminum alloy	Composite PPS GF reinforced	
DIFFUSERS	Anodized aluminum alloy	Composite PPS GF reinforced crossover design with marine grade aluminum vane tips	
SEAL	Blister resistant mechanical rotary seal with integrated drive bushing	Balanced elastomeric bellows and silicon carbide mechanical rotary seal	
BEARING	Maintenance-free 25 mm double row sealed bearing	Maintenance-free 12 mm double row sealed bearing	
BUSHING	Sintered bronze bushing	Sintered bronze bushing	
SHAFT	Stainless steel	Stainless steel	
CONNECTIONS	Inlet 51 mm (2") Male NPSH / Outlet 38 mm (1'5") Male NPSH	Inlet 51 mm (2") Male NPSH / Outlet 38 mm (1'5") Male NPSH	
BACKPACK FRAME	Steel powder coated grey with optional baseboard	Composite frame with integrated backboard and vibration mounts	
STRAPS	Nylon straps (Optional)	Optional padded strap with military-grade Fidlock® quick-release system (Item No. 701798)	
CARRY HANDLE	N/A	Aluminum powder coated black	
DIMENSIONS	L 580 x W 307 x H 410 mm (L 23 x W 12 x H 16.25")	L 549 x W 305 x H 371 mm (L 21.6 x W 12 x H 14.6")	
DRY WEIGHT	26.4 kg (58.3 lbs)	20 kg (44 lbs)	
LUBRICATION	Fuel mix ratio: 50:1 (gasoline to oil)	Fuel mix ratio: 50:1 (gasoline to oil)	
FUEL TYPE	Gasoline: unleaded 87 octane automotive gasoline (maximum 10% ethanol) Oil: 2-cycle mixing oil with API-TC, JASO FD and ISO-L-EGD certification (Amsoil Saber® Professional Synthetic)	Gasoline: unleaded 87 octane automotive gasoline (maximum 10% ethanol Oil: 2-cycle mixing oil with API-TC, JASO FD and ISO-L-EGD certification (Amsoil Saber® Professional Synthetic)	
FUEL CONSUMPTION	5.7 L/hr (1.5 US GPH)	5.7 L/hr (1.5 US GPH)	
MAX HEAD	267 m (877')	267 m (877')	
MAX PRESSURE	26.2 bar (380 PSI)	26.2 bar (380 PSI)	
MAX FLOW	371 L/min (98 US GPM)	379 L/min (100 US GPM)	

All product functions, specifications and data are subject to change without notice.

MARK-3®

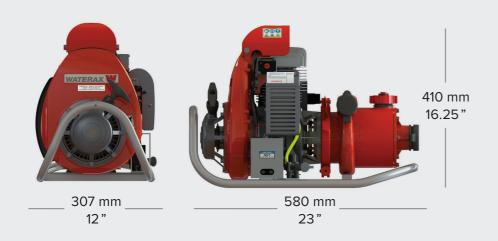

• Weight: 26.4 kg (58.3 lbs)

MARK-3® Watson Edition



• Weight: 20 kg (44 lbs)



Your trusted partner

Trusted by wildland firefighters around the world, WATERAX sets the industry standard by developing innovative, portable fire pumps and water-handling equipment designed to withstand demanding applications and rugged environments. With a time-tested legacy of reliability, WATERAX carries on its mission to place powerful, precision-engineered pumps into the hands of the men and women who need to move water to protect our lives and property from the ravages of wildfires.

Send us an email or contact the WATERAX representative in your country to learn more and schedule a demonstration of the MARK-3® Watson Edition.





