

**WATERAX**   
WE MOVE WATER

## **MINI-MARK®**

2-Stroke Lightweight  
High-Pressure Pump



# Innovative Solutions for Wildland Firefighters

The **MINI-MARK® lightweight high-pressure pump** is here, seamlessly blending the legacy of its predecessor with cutting-edge technology to meet the demands of today's wildland firefighters. This new lightweight high-pressure pump model pays tribute to the original **MINI-MARK®** from the 1990s, known for its lightweight design and reliable performance in initial attack fires. Equipped with a powerful 2.3 hp (1.72 kW) 2-stroke engine and a single-stage pump end, the **MINI-MARK®** delivers impressive pressures of up to 85 PSI (6 bar) and a maximum flow rate of 102 US GPM (386 L/Min), ensuring an invaluable asset in firefighting operations.

Designed for versatility and portability, the **MINI-MARK® lightweight pump** excels in various applications, including initial attack firefighting, structure protection, sprinkler operations, and tandem pumping over long distances. Its compact size and backpackable design enable firefighters to easily transport it to remote locations, ensuring they have the necessary resources at their fingertips during critical moments. This innovative pump features an electronic overspeed cutout switch, safeguarding against engine and pump damage during loss of prime conditions, while its anodized aluminum components enhance durability. With the **MINI-MARK®, WATERAX** continues its commitment to providing wildland firefighters with high-performance tools that empower them to protect communities and ecosystems effectively, all while embracing modern firefighting demands.

Once again, this evolution marks a new chapter for **WATERAX**, focusing on reliable and efficient fire-fighting solutions.





# Applications

- Initial attack firefighting
- Structure protection
- Sprinkler operations
- Tandem pumping over long distances



# Features and benefits

- Portable, lightweight and compact
- Anodized aluminum alloy pump components
- Composite corrosion-resistant impeller
- Electronic overspeed cutout switch
- Multiposition - capable of running at any angle
- Optimal Operating Point: 50 GPM @ 50 PSI (189 LPM @ 3.4 bar)
- Integrated, ergonomic carry handle
- Detachable pump end
- Throttle with detents to avoid throttle drift
- Centrifugal clutch feature



## Optional external fuel tank connection kit available

- Integral fuel tank autonomy of one hour
- External fuel tank autonomy of 20 hours


# Specifications

## Flow rate at specified pressure

- Maximum pressure: 85 PSI (6 bar)
- Free Flow: 102 US gals/min (386 L/min)
- Maximum Head: 196' (60 m)

MINI-MARK®				
Flow			Pressure	
US GPM	L/min		PSI	Bar
66	250	@	25	1.7
50	189	@	50	3.4
12	45	@	75	5.2

# MINI-MARK® flow rate at specified pressure

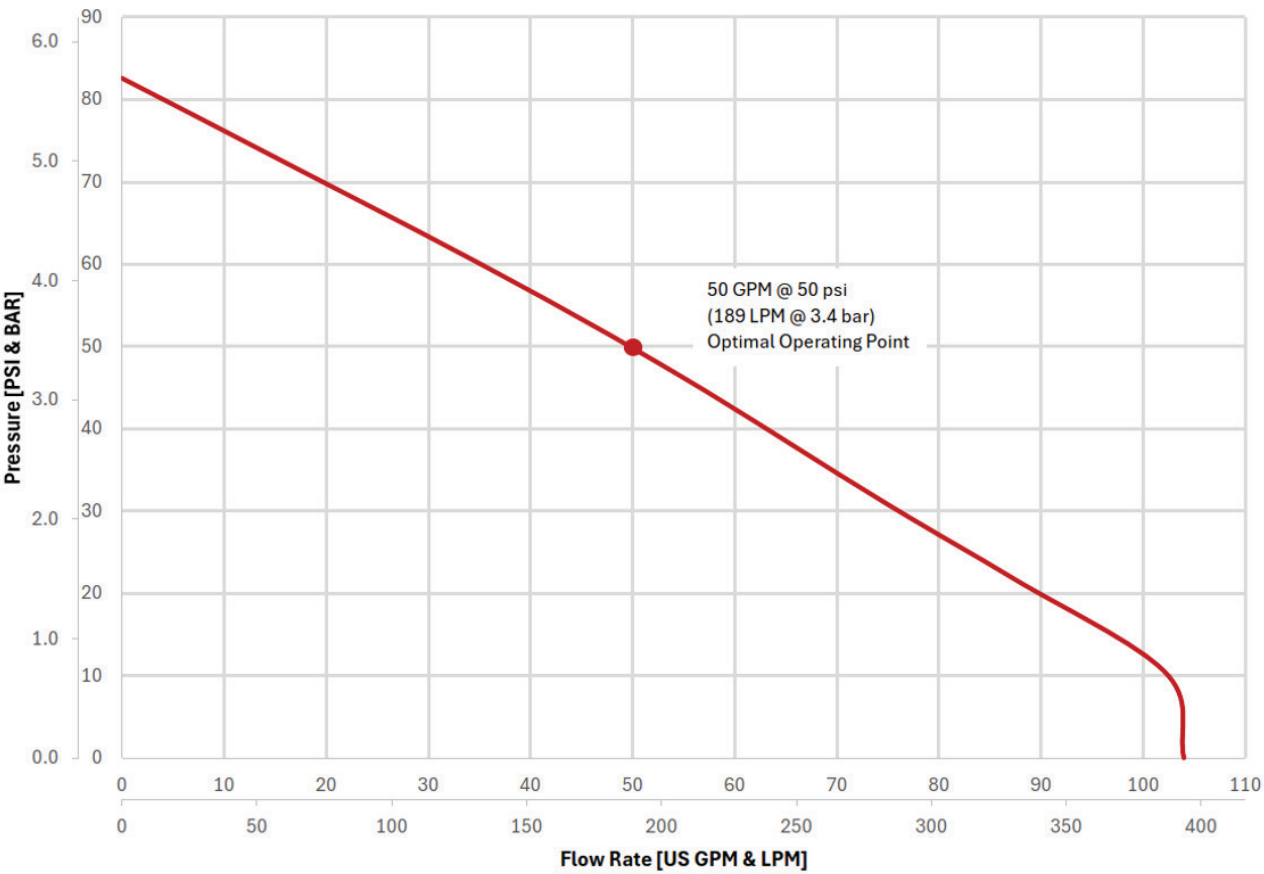

# Technical Specifications

	ENGINE SPECIFICATIONS
MAXIMUM POWER	2.3 hp (1.72 kW) @ 7,000 RPM
MAXIMUM TORQUE	2.1 lb-ft (2.84 Nm) @ 4,000 RPM
DISPLACEMENT	49.9 cc (3.05 cu in)
STARTING SYSTEM	Recoil starter
IGNITION	Capacitive discharge ignition (CDI)
AIR CLEANER	Semi dry type
CARBURETOR	Diaphragm type with integrated purge bulb
LUBRICATION	Fuel mix ratio: 50:1 (gasoline to oil)
FUEL TYPE	Gasoline: 87 octane automotive gasoline (maximum 10% ethanol). Oil: 2-cycle mixing oil with API-TC, JASO FD and ISO-L-EGD certification
FUEL TANK CAPACITY	0.26 US gal (1 L)
FUEL CONNECTOR	Optional kit: Three-way valve, SAE 45° connection for external fuel tank
FUEL CONSUMPTION	0.24 US gals/hr (0.91 L/hr)

	PUMP SPECIFICATIONS
TYPE	Single-stage, centrifugal pump
DRIVE	Centrifugal clutch
MAXIMUM ALLOWABLE PRESSURE	200 PSI (13.8 bar)
MAXIMUM PRESSURE	85 PSI (6 bar)
MAXIMUM FLOW	102 GPM (386 lpm)
INTAKE	2" (51 mm) NPSH
DISCHARGE	1-1/2" (38 mm) NPSH
VOLUTE AND SUCTION COVER	Foam compatible, lightweight anodized aluminum alloy
IMPELLER	Composite corrosion resistant
SEAL	Mechanical rotary seal
PUMP SHAFT	Stainless steel
CONTROLS	Push OFF button with electronic overspeed cutoff
THROTTLE	With detents to avoid throttle drift

## MINI-MARK®



12"  
305 mm



13 1/8"  
333 mm

12 3/4"  
324 mm

• Weight: 19 lbs (8.6 kg)



## **WATERAX CORP.**

3701 Innovation Way,  
Valparaiso, IN 46383

**T** 360-574-1818  
**F** 360-571-0443  
**TF** 1 855 616-1818

## **WATERAX INC.**

6635 Henri-Bourassa W.  
Montreal, QC H4R 1E1

**T** 514 637-1818  
**F** 514 637-3985  
**TF** 1 855 616-1818

**INFO@WATERAX.COM**  
**WATERAX.COM**



**WATERAX**   
**WE MOVE WATER**