




MINI-MARK®

2-STROKE LIGHTWEIGHT HIGH-PRESSURE PUMP

Designed for efficiency and reliability, the **MINI-MARK®** packs a powerful punch in a compact frame. Whether it's initial attack firefighting or structure protection, the **MINI-MARK®** is the ultimate lightweight solution for demanding operations.

MINI-MARK® flow rate at specified pressure

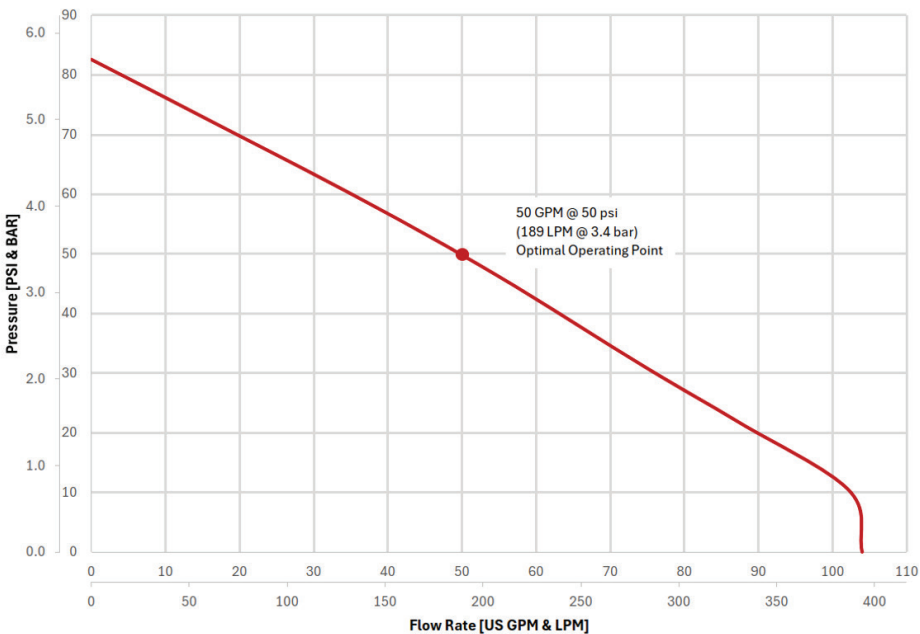

Weight: 19 lbs (8.6 kg)

Optional external fuel tank connection kit available

- Integral fuel tank autonomy of one hour
- External fuel tank autonomy of 20 hours

APPLICATIONS

- Initial attack firefighting
- Structure protection
- Sprinkler operations
- Tandem pumping over long distances

FEATURES AND BENEFITS

- Portable, lightweight and compact
- Anodized aluminum alloy pump components
- Composite corrosion-resistant impeller
- Electronic overspeed cutout switch
- Multiposition - capable of running at any angle
- Optimal Operating Point: 50 GPM @ 50 PSI (189 LPM @ 3.4 bar)
- Integrated, ergonomic carry handle
- Detachable pump end
- Throttle with detents to avoid throttle drift
- Centrifugal clutch feature

Scan the QR code to find information on all configurations

