




Item no: **100111**

The **VS2-9W** pump is powered by a 9 HP Honda engine configured to be portable with a wraparound frame.

It is a versatile, rugged, and economical twin impeller self-priming pump.

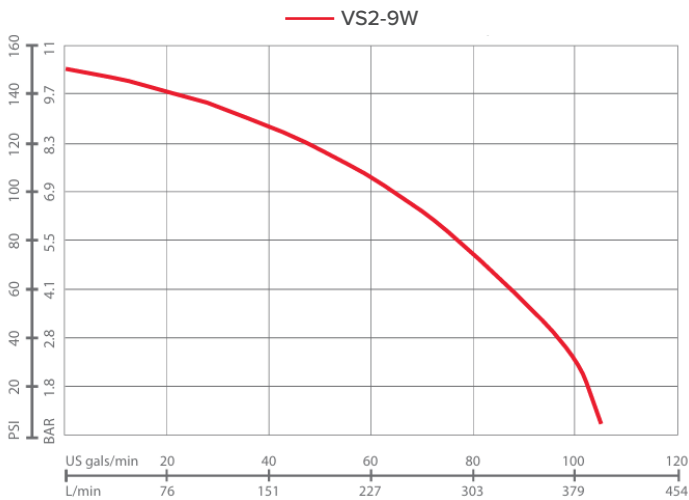

Flow rate at specified pressure

Maximum pressure: **150 PSI** (10.3 Bar)
 Free flow: **105 US gals/min** (397 L/min)
 Maximum head: **347'** (106 m)
 Dry weight: **99 lbs** (44.8 kg)

Performance

Flow		Pressure		
US GPM	L/min	@	PSI	Bar
92	348	@	50	3.4
80	303	@	75	5.2
64	242	@	100	6.9

VS2-9W

MULTIPURPOSE PUMP

APPLICATIONS

- Firefighting.
- Tank filling.
- High head general water transfer.
- Boom spraying.
- Irrigation.

FEATURES AND BENEFITS

- Twin impeller design provides additional pressure for longer & higher pumping applications.
- Pump casing and diffusers manufactured from quality corrosion resistant grade aluminium for long life.
- Nylon glass fiber reinforced impellers fully corrosion proof and lightweight.
- 3-way discharge port for easy installation.
- Powder coated casing for added corrosion resistance.
- Self-priming for more versatile installation options.
- Easy to access drain port.
- Low oil protection.
- EPA Certified.

Scan the QR code to learn more

